



Technical data sheet

IGP-DURA®guard 3207E-A1

Silk gloss anti-graffiti powder paint of smooth finish and with good general resistances for interior application.

**Characteristics**

- Silk gloss
- Smooth finish
- Pearl mica
- Indoor quality
- Anti-Graffiti

**Powder properties**

Particle size:	< 100 µm
Solids:	> 99 %
Density:	1.3 kg/l-1.6 kg/l
Suitability for storage:	min. 18 months at ≤ 25 °C in an unopened original container
Color tones:	RAL Metallic and individual metallic colors on request

**Processing****Pre-treatment**

The substrate must be free from oil, grease and oxidation products. The pretreatment depends on the type of substrate and the corrosion protection to be achieved. We recommend the following pretreatments:

Aluminium

- Chromating according to DIN EN 12487
- Pre-anodization
- Chrome-free pretreatment according to GSB International and QUALICOAT specifications

Steel

- Zinc phosphating
- Iron phosphating

Galvanised steel

- Zinc phosphating
- Chrome (III) passivation
- Chromating according to DIN EN 12487

The suitability of the pretreatment method used is generally to be tested by the coater in advance with appropriate test methods. The minimum requirement for aluminium substrates / galvanised steel components is to carry out a boiling water test with a subsequent cross-cut adhesion and tape test. We refer to the guidelines of the GSB International, Qualicoat and Qualisteelcoat certifications. For further information: see also our special leaflet on pre-treatment (IGP-TI 100).

Coating devices

All conventional electrostatic systems with corona charging.


For the construction and operation of powder coating plants, the following regulations must be complied with: ATEX RL 2014/34/EU, EN 50177, DIN EN 16985.

Recommended film thickness

60 µm - 80 µm

A homogeneous coating result with textured paints or colour or article-specific differences in hiding power may require higher Film thicknesses. The corresponding processing guidelines must be observed. For a preliminary calculation of the required powder coating quantity, the required Film thickness must be determined for each specific article.

Curing conditions

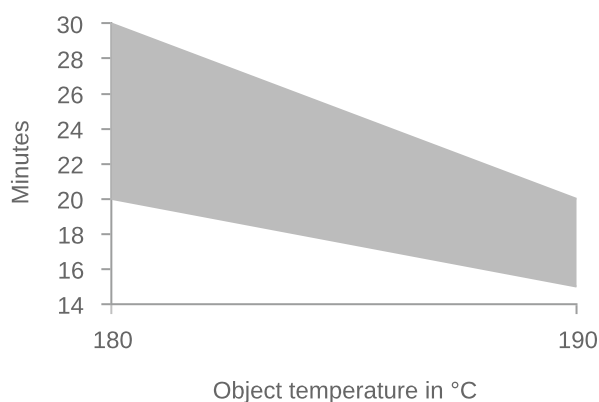

T _{Object}	t _{min}	t _{max}
180 °C	20 minutes	30 minutes
190 °C	15 minutes	20 minutes

In order to determine ideal curing conditions, we recommend practical trials with the respective object and curing oven.

Due to e-caprolactam emissions during the curing process it is necessary to take care for a good ventilation to comply with the permitted occupational exposure limits concentrations.

Application

For an optimal coating and surface quality, please refer to the effect category on the container label and the recommendations in the processing guideline VR201.1.

Reclaimability

To prevent colour variations caused by loss of effect during coating, pearlescent mica products should be processed without reclaiming. In the case of automated coating with an appropriate batch size, a certain quantity of reclaimed powder may be added, depending on the shade's categorisation. Please refer to the effect category on the container label and processing guideline VR201.1.



Film properties

Tested on

Substrate:	Aluminum, 0.8mm, AQT 36
Film thickness:	60 µm - 80 µm
Object temperature:	190 °C, 15 min.

Appearance

Gloss level	65-85 R'/60°	DIN EN ISO 2813 2015-02
-------------	--------------	-------------------------

Mechanical tests

Cross-cut adhesion test	Gt 0	DIN EN ISO 2409 2020-12
Mandrel bending test / Tape test	≤ 8 mm	DIN EN ISO 1519 2011
Impact test / Tape test	≥ 10 inchp.	ASTM D 2794 1993
Erichsen cupping / Tape test	≥ 3 mm	DIN EN ISO 1520 2007-11
Buchholz hardness	≥ 80	DIN EN ISO 2815 2003-10 (Anhang A)

Corrosion tests

Condensation water test, 500-1000h*	No infiltration, no blisters. *depending on pretreatment	DIN EN ISO 6270-2 2018-04
Natural salt spray test, 500-1000h*	No infiltration, no blisters. *depending on pretreatment.	DIN EN ISO 9227 2017-07

Chemical tests

Organic solvents	Outstanding resistance to organic solvents
Cleaning	IGP-DURAclean® properties allow efficient removal of contamination by commercially available cleaning agents and/or disinfectants



Further information

Packaging

20 kg cardboard box with inserted antistatic PE liner
400 kg cardboard container with 20 antistatic PE-liners each 20kg
500 kg cardboard container with 25 antistatic PE-liners each 20kg

Overcoating suitability

For overcoating anti-graffiti powder coatings, sanding and preliminary tests are mandatory.

Printing and glueing

Preliminary tests are mandatory.

Protection of coated parts

Coated parts should be packed after cooling with suitable materials without plasticizers. They should be stored protected from the weather to avoid the formation of condensation and thus water spots on the coating.

Cleaning

The coated parts must be cleaned according to the directives RAL-GZ 632 or SZFF 61.01. Technical Information IGP-TI 106 must also be observed when dealing with pearl mica effects.

Graffiti removal

The following procedure should be observed when removing graffiti:

- The contact time of the graffiti with the surface must be kept as brief as possible
- Preliminary tests to select a suitable graffiti remover
- Thorough rinsing of the cleaned areas with water
- The contact time of the graffiti remover with the surface must be kept as brief as possible

IGP recommendation:

- Elite 007 graffiti remover from Crous Chemicals GmbH
- Socostrip T4210P from Socomore
- Bonderite S-ST 1302 and Bonderite C-MC 400 from Henkel AG
- or a different non-abrasive cleaner

Paint removal and disposal

After use, coated goods should be supplied to the normal recycling process. The disposal methods for sludges or residual powders must be observed in accordance with the local official provisions whilst taking Waste Code "080201 Coating Powder Wastes" in accordance with the European Waste Catalogue into consideration.

This application-related advice is given to the best of our knowledge. However, this information is non-obligatory and does not exempt you from carrying out your own tests. Application, use and processing of these products are beyond our control and are therefore on your responsibility.

Consult the Safety Data Sheet prior to use. Article-specific safety data sheet and comprehensive risk management measures available at: [igp-powder.com](https://www.igp-powder.com)