

app.print.technical_data_sheet.title

IGP-DURA[®] xal/4201U-L1

Super-durable, effect containing coating powder for deep matte surfaces, produced with IGP-Effectives[®] technology for maximum effect stability.



app.print.technical_data_sheet.characteristics

- Deep matte
- Smooth finish
- IGP-Effectives[®]
- Super durable facade quality, 3 years Florida > 50% residual gloss
- Lower cure
- Touchproof



- Qualicoat Nr. P-1909, class 2
- AAMA 2604-13, independent test report



app.print.technical_data_sheet.powder_properties.title

app.print.technical_data_sheet.powder_properties.particle_size: 100 per cent
 app.print.technical_data_sheet.powder_properties.solid: 99.96 per cent
 app.print.technical_data_sheet.powder_properties.particle_density: 1.2 kg per liter
 app.print.technical_data_sheet.powder_properties.storage_suitability.prefix: 18 months
 app.print.technical_data_sheet.powder_properties.storage_suitability.at: 25 °C
 app.print.technical_data_sheet.powder_properties.storage_suitability.in an unopened original container
 app.print.technical_data_sheet.powder_properties.special_features: All metallic and non-metallic metallic colors on request



app.print.technical_data_sheet.processing.title

app.print.technical_data_sheet.processing.substrates

The substrate must be free from oil, grease and oxidation products. The pretreatment depends on the type of substrate and the corrosion protection to be achieved. We recommend the following pretreatments:

- Aluminium
- Chromating according to DIN EN 12487
 - Pre-anodization
 - Chrome-free pretreatment according to GSB International and QUALICOAT specifications

Steel

- Zinc phosphating

Galvanised steel

- Zinc phosphating
- Chrome (III) passivation
- Chromating according to DIN EN 12487

For improved corrosion protection for applications on steel / galvanised steel, the use of corrosion protection primer IGP-KORROPRIMER 10 or IGP-KORROPRIMER 60 is recommended.

The suitability of the pretreatment method used is generally to be tested by the coater in advance with appropriate test methods. The minimum requirement for aluminium substrates / galvanised steel components is to carry out a boiling water test with a subsequent cross-cut adhesion and tape test. We refer to the guidelines of the GSB International, Qualicoat and Qualisteelcoat certifications. For further information: see also our special leaflet on pre-treatment (IGP-TI 100).

app.print.technical_data_sheet.processing.coating_devices

All conventional electrostatic systems with corona charging.


For the construction and operation of powder coating plants, the following regulations must be complied with: ATEX RL 2014/34/EU, EN 50177, DIN EN 16985.

app.print.technical_data_sheet.processing.recommended_film_thickness

60 µm - 80 µm

A homogeneous coating result with textured coatings or article-and color specific differences in hiding power may require higher coating thicknesses. The corresponding processing guidelines must be observed. For a pre-calculation of the required powder coating quantity, the necessary coating thickness must be determined for each article.

app.print.technical_data_sheet.processing.curing_condition_recommendation

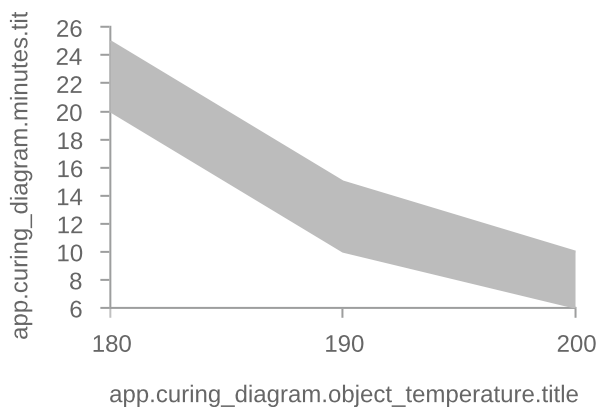

app.print.technical_data_sheet.processing.curing_conditi

180 °C

190 °C

200 °C

In order to determine ideal curing conditions, we recommend practical trials with the respective object and curing oven.

Additional information regarding processing can also be found in the IGP processing instruction VR207.2 "IGP-DURA®xal". Our Technical Customer Service Department will be happy to help you.

app.print.technical_data_sheet.processing.application_instruction

IGP processing instruction for "IGP-DURA®xal": VR207.2.

app.print.technical_data_sheet.processing.reclaimability

Due to the high bonding rate of powder grain and effect agent, the powder can be charged much more uniformly compared to other effect finishing processes. As a result, the powder can be processed with a significantly increased recovery rate. Please also refer to the IGP processing guideline for IGP-Effectives® powder coatings: VR201.2



app.print.technical_data_sheet.film_properties.title

app.print.technical_data_sheet.film_properties.tested_on.title

app.print.technical_data_sheet.film_properties.tested_on.title: Aluminum (AlMg1) 0.8 mm chrom-free
app.print.technical_data_sheet.film_properties.film_thickness: 60 µm
app.print.technical_data_sheet.film_properties.curing_object_temperature: 190°C ± 3.0

app.print.technical_data_sheet.film_properties.appearance

app.print.technical_data_sheet.film_properties.appearance: Top 1 R / 60 Gloss level DIN EN ISO 2813 2015-02

app.print.technical_data_sheet.film_properties.mechanical_tests

Cross-cut adhesion test	Gt 0	DIN EN ISO 2409 2020-12
Mandrel bending test / Tape test	≤ 5 mm	DIN EN ISO 1519 2011
Impact test / Tape test	≥ 20 inchnp.	ASTM D 2794 1993
Erichsen cupping / Tape test	≥ 5 mm	DIN EN ISO 1520 2007-11
Buchholz hardness	≥ 80	DIN EN ISO 2815 2003-10

app.print.technical_data_sheet.film_properties.weathering_tests

3 years Florida, 5° south	> 50 %	DIN EN ISO 2810 2021-01
	app.print.technical_data_sheet.film_properties.residual_gloss	
Xenon-arc lamps, 1000h, 90%	> 90 %	DIN EN ISO 16474-2 2014-03
	app.print.technical_data_sheet.film_properties.residual_gloss	

app.print.technical_data_sheet.film_properties.corrosion_tests

Acetic acid salt spray test, 1000h	No infiltration, no blisters	DIN EN ISO 9227 2017-07
Condensation water test, 1000h	No infiltration, no blisters	DIN EN ISO 6270-2 2018-04

app.print.technical_data_sheet.film_properties.chemical_tests

Mortar resistance	Easily removable after 24h with no residues.	ASTM D 3260 2001
-------------------	--	------------------



app.print.technical_data_sheet.more_information.title

app.print.technical_data_sheet.packaging.title

20 kg cardboard box with inserted antistatic PE liner

app.print.technical_data_sheet.processing.overcoating

Preliminary tests are mandatory for overcoating painted surfaces.

app.print.technical_data_sheet.processing.printing_and_glueing

Preliminary tests are mandatory for printing and glueing of painted surfaces.

app.print.technical_data_sheet.more_information.protection_of_coated_parts

Coated parts should be packed after cooling with suitable materials without plasticizers. They should be stored protected from the weather to avoid the formation of condensation and thus water spots on the coating.

app.print.technical_data_sheet.more_information.cleaning

The coated parts must be cleaned according to the directives RAL-GZ 632 or SZFF 61.01. Technical Information IGP-TI 106 must also be observed when dealing with pearl mica effects.

app.print.technical_data_sheet.more_information.paint_removal_and_disposal

After use, coated goods should be supplied to the normal recycling process. The disposal methods for sludges or residual powders must be observed in accordance with the local official provisions whilst taking Waste Code "080201 Coating Powder Wastes" in accordance with the European Waste Catalogue into consideration.

app.print.technical_data_sheet.infobox