



Technical data sheet

IGP-HWFclassic 5907M-S3 Melted Metal

Superdurable powder coating for silk-gloss and smooth surfaces, based on highly brilliant metal interference pigments.



Characteristics

- Silk gloss
- Smooth finish
- Melted Metal, Premium
- Super durable facade quality, 3 years Florida > 50% residual gloss
- Increased scratch resistance
- Clean Effect



Material approvals

- [Qualicoat Nr. P-1136, class 2](#)
- Part of QSC-System
- [EPD IGP-HWFclassic 59](#)
- [AAMA 2604-13, independent test report](#)



Powder properties

| | |
|--------------------------|--|
| Particle size: | < 100 µm |
| Solids: | > 99 % |
| Density: | 1.3 kg/l-1.6 kg/l |
| Suitability for storage: | min. 24 months at ≤ 25 °C in an unopened original container |
| Color tones: | 8 shades with metal interference pigments |



Processing

Pre-treatment

The substrate must be free from oil, grease and oxidation products. The pretreatment depends on the type of substrate and the corrosion protection to be achieved. We recommend the following pretreatments:

Aluminium

- Chromating according to DIN EN 12487
- Pre-anodization
- Chrome-free pretreatment according to GSB International and QUALICOAT specifications

Steel

- Zinc phosphating

Galvanised steel

- Zinc phosphating
- Chrome (III) passivation
- Chromating according to DIN EN 12487

For improved corrosion protection for applications on steel / galvanised steel, the use of corrosion protection primer IGP-KORROPRIMER 10 or IGP-KORROPRIMER 60 is recommended.

The suitability of the pretreatment method used is generally to be tested by the coater in advance with appropriate test methods. The minimum requirement for aluminium substrates / galvanised steel components is to carry out a boiling water test with a subsequent cross-cut adhesion and tape test. We refer to the guidelines of the GSB International, Qualicoat and Qualisteelcoat certifications. For further information: see also our special leaflet on pre-treatment (IGP-TI 100).

Coating devices

All conventional electrostatic systems with corona charging.


For the construction and operation of powder coating plants, the following regulations must be complied with: ATEX RL 2014/34/EU, EN 50177, DIN EN 16985.

Recommended film thickness

80 µm - 100 µm

For each coating of melted metal products, the system settings must be made in accordance with VR 216. In particular, the note on nozzle rinsing air and gun distance in the processing section of VR 16 must be observed.

Curing conditions

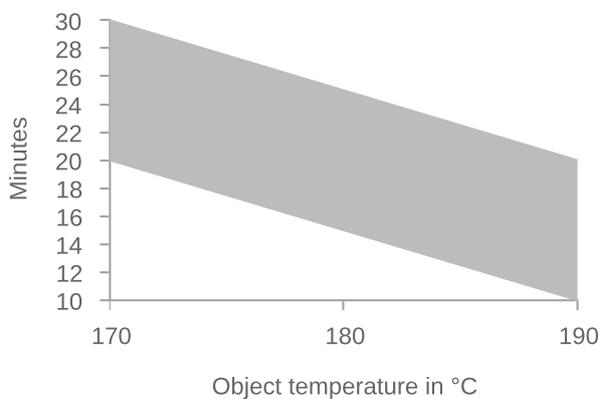

| T Object | t min | t max |
|---------------|-------------------|-------------------|
| 170 °C | 20 minutes | 30 minutes |
| 180 °C | 15 minutes | 25 minutes |
| 190 °C | 10 minutes | 20 minutes |

Application

For safe and stable processing of the products, a slightly increased total air / metering air should be used, especially when conveying by means of pump technology.

For detailed information, please refer to the information in the section "processing" in the processing guideline VR216.

Reclaimability

Small amounts of recovered powder can be added to the fresh powder, automatically if possible. Important: Keep overspray to an absolute minimum. Processing instruction VR216 must be observed.



Film properties

Tested on

| | |
|---------------------|-------------------------------------|
| Substrate: | Aluminum (AlMg1), 0.8 mm chrom-free |
| Film thickness: | 60 µm - 80 µm |
| Object temperature: | 180 °C, 15 min. |

Appearance

| | | |
|-------------|--------------|-------------------------|
| Gloss level | 70-90 R'/60° | DIN EN ISO 2813 2015-02 |
|-------------|--------------|-------------------------|

Mechanical tests

| | | |
|--|----------|------------------------------------|
| Cross-cut adhesion test | Gt 0 | DIN EN ISO 2409 2020-12 |
| Mandrel bending test / Tape test | ≤ 5 mm | DIN EN ISO 1519 2011 |
| Impact test / Tape test | ≥ 2.5 Nm | ASTM D 2794 1993 |
| Erichsen cupping / Tape test | ≥ 5 mm | DIN EN ISO 1520 2007-11 |
| Buchholz hardness | ≥ 80 | DIN EN ISO 2815 2003-10 (Anhang A) |
| Robustness according to Martindale, residual gloss_50% | ≥ 50 % | IGP AA341.62 |

Weathering tests

| | | |
|-----------------------------|-----------------------|----------------------------|
| 3 years Florida, 5° south | > 50 % residual gloss | DIN EN ISO 2810 2021-01 |
| Xenon-arc lamps, 1000h, 90% | > 90 % residual gloss | DIN EN ISO 16474-2 2014-03 |

Corrosion tests

| | | |
|------------------------------------|------------------------------|---------------------------|
| Condensation water test, 1000h | No infiltration, no blisters | DIN EN ISO 6270-2 2018-04 |
| Acetic acid salt spray test, 1000h | No infiltration, no blisters | DIN EN ISO 9227 2017-07 |

Chemical tests

| | | |
|-------------------|--|------------------|
| Mortar resistance | Easily removable after 24h with no residues. | ASTM D 3260 2001 |
|-------------------|--|------------------|



Further information

Packaging

20 kg cardboard box with inserted antistatic PE liner

Overcoating suitability

Preliminary tests are mandatory for overcoating painted surfaces.

Printing and glueing

Preliminary tests are mandatory for printing and glueing of painted surfaces.

Protection of coated parts

Coated parts should be packed after cooling with suitable materials without plasticizers. They should be stored protected from the weather to avoid the formation of condensation and thus water spots on the coating.

Cleaning

The coated parts must be cleaned according to the directives RAL-GZ 632 or SZFF 61.01. Technical Information IGP-TI 106 must also be observed when dealing with pearl mica effects.

Paint removal and disposal

After use, coated goods should be supplied to the normal recycling process. The disposal methods for sludges or residual powders must be observed in accordance with the local official provisions whilst taking Waste Code "080201 Coating Powder Wastes" in accordance with the European Waste Catalogue into consideration.

This application-related advice is given to the best of our knowledge. However, this information is non-obligatory and does not exempt you from carrying out your own tests. Application, use and processing of these products are beyond our control and are therefore on your responsibility.

Consult the Safety Data Sheet prior to use. Article-specific safety data sheet and comprehensive risk management measures available at: **igp-powder.com**