



## Technical data sheet

# IGP-HWFclassic 592SC-A8 Living Surfaces

Silk-matte powder coating with variable grain structure and unicolored speckles based on saturated polyester, super durable, for stoving conditions from 20' 170° C.



## Characteristics

- Silk gloss
- Coarse texture
- Speckled
- Super durable facade quality,  
3 years Florida > 50% residual gloss



## Material approvals

- Qualicoat Nr. P-1262, class 2



## Powder properties

Particle size:	< 1 000 µm
Solids:	> 99 %
Density:	1.3 kg/l-1.6 kg/l
Suitability for storage:	min. 18 months at ≤ 25 °C in an unopened original container
Color tones:	Due to the limited volume of highly weather-resistant pigments, the product portfolio only has a small amount of different shades in accordance with the special IGP colour range.



## Processing

### Pre-treatment

For this product, a substrate-specific pretreatment and corresponding primer application is highly recommended. The single-layer application is carried out at the user's own responsibility.

#### Aluminium

- Chromating according to DIN EN 12487
- Chrome-free pretreatment according to GSB International and QUALICOAT specifications
- Pre-anodization

#### Steel

- Zinc phosphating

Galvanised steel

- Zinc phosphating
- Chrome (III) passivation
- Chromating according to DIN EN 12487

The suitability of the pretreatment method used is generally to be tested by the coater in advance with appropriate test methods. The minimum requirement for aluminium substrates / galvanised steel components is to carry out a boiling water test with a subsequent cross-cut adhesion and tape test. We refer to the guidelines of the GSB International, Qualicoat and Qualisteelcoat certifications. For further information: see also our special leaflet on pre-treatment (IGP-TI 100).

### Coating devices

All conventional electrostatic systems with corona charging.

For the construction and operation of powder coating plants, the following regulations must be complied with: ATEX RL 2014/34/EU, EN 50177, DIN EN 16985.

### Recommended film thickness

100 µm - 200 µm

Aluminium substrate:

For the application IGP-HWFclassic 592S...A81 on aluminium, the use of a colour-similar highly weather-resistant fine structure as a primer, either IG-HWFclassic 591TA...R10 or also 591TC...A11 in a minimum layer thickness of 60 µm is recommended.

In this case, the minimum layer thickness of the Top-Coat

592S...A81 may be less than 130 µm after testing.


The processing guidelines (VR 213) must additionally be observed.

Steel substrate:

For the application of IGP-HWFclassic 592S...A81 on bare steel or galvanised steel, the use of the corrosion protection primer IGP-KORROPRIMER 60 in a minimum layer thickness of 80 µm is mandatory.

For the application of IGP-KORROPRIMER 60, please refer to the technical data sheet IGP-KORROPRIMER 60 and additionally the processing guidelines (VR 213) must be observed.

### Curing conditions

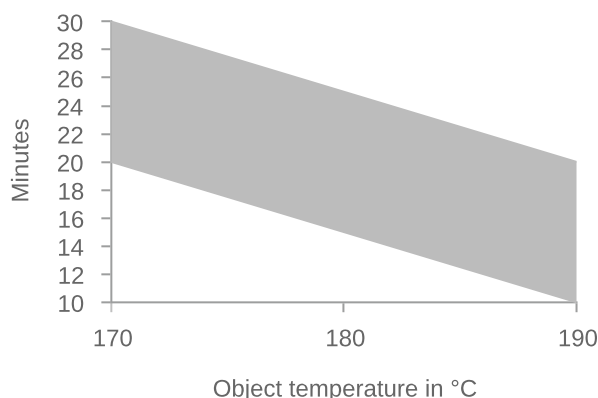

T <sub>Object</sub>	t <sub>min</sub>	t <sub>max</sub>
170 °C	20 minutes	30 minutes
<b>180 °C</b>	<b>15 minutes</b>	<b>25 minutes</b>
190 °C	10 minutes	20 minutes

In order to determine ideal curing conditions, we recommend practical trials with the respective object and curing oven.

### Application

Due to the unique particle size distribution the products enable the possibility for stucco surfaces. Application guideline VR213 "IGP -LivingSurfaces" and technical information TI 112 "IGP -LivingSurfaces" must be observed.

## Reclaimability

Due to the unique particle size distribution the products enables the possibility for stucco surfaces.  
Application guideline VR213 "IGP-LIVINGSURFACES" must be observed.



## Film properties

### Tested on

Substrate:	Aluminum (AlMg1), 0.8 mm chrom-free
Film thickness:	80 µm - 100 µm
Object temperature:	180 °C, 15 min.

### Appearance

Gloss level	1-11 R'/60°	DIN EN ISO 2813 2015-02
-------------	-------------	-------------------------

### Mechanical tests

Cross-cut adhesion test	Gt 0	DIN EN ISO 2409 2020-12
Erichsen cupping / Tape test	≥ 5 mm	DIN EN ISO 1520 2007-11
Mandrel bending test / Tape test	≤ 5 mm	DIN EN ISO 1519 2011
Impact test / Tape test	≥ 20 inchp.	ASTM D 2794 1993
Buchholz hardness	≥ 80	DIN EN ISO 2815 2003-10 (Anhang A)

### Weathering

3 years Florida, 5° south	> 50 % residual gloss	DIN EN ISO 2810 2021-01
Xenon-arc lamps, 1000h, 90%	> 90 % residual gloss	DIN EN ISO 16474-2 2014-03

### Corrosion tests

Acetic acid salt spray test, 1000h	No infiltration, no blisters	DIN EN ISO 9227 2017-07
Condensation water test, 1000h	No infiltration, no blisters	DIN EN ISO 6270-2 2018-04

### Chemical tests

Mortar resistance	Easily removable after 24h with no residues.	ASTM D 3260 2001
-------------------	--	------------------



## Further information

### Packaging

20 kg cardboard box with inserted antistatic PE liner  
400 kg cardboard container with 20 antistatic PE-liners each 20kg  
500 kg cardboard container with 25 antistatic PE-liners each 20kg

### Overcoating

see VR213 LivingSurfaces

**Printing and glueing**

Preliminary tests are mandatory for printing and glueing of painted surfaces.

**Protection of coated parts**

Coated parts should be packed after cooling with suitable materials without plasticizers. They should be stored protected from the weather to avoid the formation of condensation and thus water spots on the coating.

**Cleaning**

see TI115

**Paint removal and disposal**

After use, coated goods should be supplied to the normal recycling process. The disposal methods for sludges or residual powders must be observed in accordance with the local official provisions whilst taking Waste Code "080201 Coating Powder Wastes" in accordance with the European Waste Catalogue into consideration.

This application-related advice is given to the best of our knowledge. However, this information is non-obligatory and does not exempt you from carrying out your own tests. Application, use and processing of these products are beyond our control and are therefore on your responsibility.

Consult the Safety Data Sheet prior to use. Article-specific safety data sheet and comprehensive risk management measures available at: **[igp-powder.com](http://igp-powder.com)**