



app.print.technical\_data\_sheet.title

## IGP-DURA® face 5803E-A3

Matte, smooth-finish powder coating with good weather resistance based on saturated polyester and declaration-free hardener.



### app.print.technical\_data\_sheet.characteristics

- Matte
- Smooth finish
- Pearl mica
- Premium
- Standard facade quality, 1 year Florida > 50% residual gloss



### app.print.technical\_data\_sheet.materials

- Part of QSC-System
- Qualicoat Nr. P-0540, class 1
- Qualicoat Nr. P-1735, class 1
- QSC ST2 PE-0015/IGP-KORROPRIMER 1001
- QSC ST2 PE-0016/IGP-KORROPRIMER 6007
- QSC HD2 PE-0017/IGP-KORROPRIMER 1001
- QSC HD2 PE-0018/IGP-KORROPRIMER 6007
- QSC MS2 PE-0074/IGP-KORROPRIMER 1001
- AAMA 2603-15, independent test report



### app.print.technical\_data\_sheet.powder\_properties.title

app.print.technical\_data\_sheet.powder\_properties.particle\_size: 100 per cent  
 app.print.technical\_data\_sheet.powder\_properties.solid: 99.8 per cent  
 app.print.technical\_data\_sheet.powder\_properties.density: 1.3 kg/l  
 app.print.technical\_data\_sheet.powder\_properties.storage\_suitability.prefix: 24 months  
 app.print.technical\_data\_sheet.powder\_properties.storage\_suitability.at: 25 °C  
 in an unopened original container  
 app.print.technical\_data\_sheet.powder\_properties.binding: RAL Metallics and non-metallic colors on request



## **app.print.technical\_data\_sheet.processing.title**

### **app.print.technical\_data\_sheet.processing.substrates**

The substrate must be free from oil, grease and oxidation products. The pretreatment depends on the type of substrate and the corrosion protection to be achieved. We recommend the following pretreatments:

#### Aluminium

- Chromating according to DIN EN 12487
- Pre-anodization
- Chrome-free pretreatment according to GSB International and QUALICOAT specifications

#### Steel

- Zinc phosphating

#### Galvanised steel

- Zinc phosphating
- Chrome (III) passivation
- Chromating according to DIN EN 12487

For improved corrosion protection for applications on steel / galvanised steel, the use of corrosion protection primer IGP-KORROPRIMER 10 or IGP-KORROPRIMER 60 is recommended.

The suitability of the pretreatment method used is generally to be tested by the coater in advance with appropriate test methods. The minimum requirement for aluminium substrates / galvanised steel components is to carry out a boiling water test with a subsequent cross-cut adhesion and tape test. We refer to the guidelines of the GSB International, Qualicoat and Qualisteelcoat certifications. For further information: see also our special leaflet on pre-treatment (IGP-TI 100).

### **app.print.technical\_data\_sheet.processing.coating\_devices**

All conventional electrostatic systems with corona charging.


For the construction and operation of powder coating plants, the following regulations must be complied with: ATEX RL 2014/34/EU, EN 50177, DIN EN 16985.

### **app.print.technical\_data\_sheet.processing.recommended\_film\_thickness**

60 µm - 80 µm

A homogeneous coating result with textured coatings or article- and color specific differences in hiding power may require higher coating thicknesses. The corresponding processing guidelines must be observed. For a pre-calculation of the required powder coating quantity, the necessary coating thickness must be determined for each article.

## app.print.technical\_data\_sheet.processing.curing\_condition\_recommendation

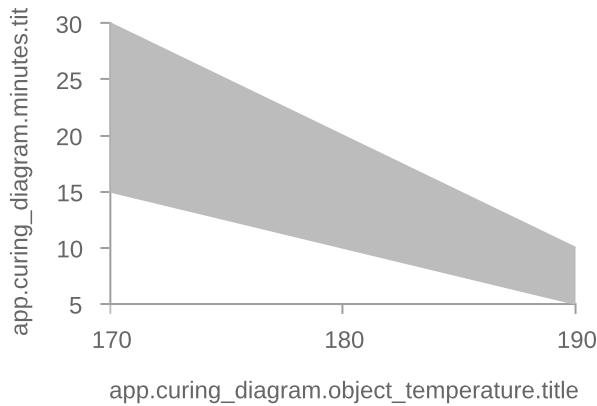

### app.print.technical\_data\_sheet.processing.curing\_conditi

170 °C

**180 °C**

190 °C

In order to determine ideal curing conditions, we recommend practical trials with the respective object and curing oven.

## app.print.technical\_data\_sheet.processing.reclaimability

Small portions of recovered powder can be added, automatically if possible, to the fresh powder. Important: Keep overspray to an absolute minimum. Processing instruction VR201.1 must be observed.



## app.print.technical\_data\_sheet.film\_properties.title

### app.print.technical\_data\_sheet.film\_properties.tested\_on.title

app.print.technical\_data\_sheet.film\_properties.tested\_on.title: Alpermet (ALG1) 0.8 mm chrom-free  
 app.print.technical\_data\_sheet.film\_properties.tested\_on.title: 60 µm film thickness:  
 app.print.technical\_data\_sheet.film\_properties.tested\_on.title: 180 °C object temperature:

### app.print.technical\_data\_sheet.film\_properties.appearance

app.print.technical\_data\_sheet.film\_properties.appearance: 25-35 R/60 Gloss\_level DIN EN ISO 2813 2015-02

### app.print.technical\_data\_sheet.film\_properties.mechanical\_tests

Cross-cut adhesion test	Gt 0	DIN EN ISO 2409 2020-12
Mandrel bending test	≤ 5 mm	DIN EN ISO 1519 2011
Impact test	≥ 20 inchp.	ASTM D 2794 1993
Buchholz hardness	≥ 80	DIN EN ISO 2815 2003-10
Erichsen cupping	≥ 5 mm	DIN EN ISO 1520 2007-11

### app.print.technical\_data\_sheet.film\_properties.weathering\_tests

1 year Florida, 5° south	> 50 %	DIN EN ISO 2810 2021-01
QUV/SE-B-313, 300h	app.print.technical_data_sheet.film_properties.residual_gloss > 50 %	DIN EN ISO 16474-3 2014-03
Xenon-arc lamps, 1000h	app.print.technical_data_sheet.film_properties.residual_gloss > 50 %	DIN EN ISO 16474-2 2014-03
	app.print.technical_data_sheet.film_properties.residual_gloss	

### app.print.technical\_data\_sheet.film\_properties.corrosion\_tests

Condensation water test, 1000h	No infiltration, no blisters	DIN EN ISO 6270-2 2018-04
Acetic acid salt spray test, 1000h	No infiltration, no blisters	DIN EN ISO 9227 2017-07

## app.print.technical\_data\_sheet.film\_properties.chemical\_tests

---

Mortar resistance

Easily removable after 24h with  
no residues.

ASTM D 3260 2001

---



## app.print.technical\_data\_sheet.more\_information.title

### app.print.technical\_data\_sheet.packaging.title

20 kg cardboard box with inserted antistatic PE liner

500 kg cardboard container with 25 antistatic PE-liners each 20kg

### app.print.technical\_data\_sheet.processing.overcoating

Preliminary tests are mandatory for overcoating painted surfaces.

### app.print.technical\_data\_sheet.processing.printing\_and\_glueing

Preliminary tests are mandatory for printing and glueing of painted surfaces.

### app.print.technical\_data\_sheet.more\_information.protection\_of\_coated\_parts

Coated parts should be packed after cooling with suitable materials without plasticizers. They should be stored protected from the weather to avoid the formation of condensation and thus water spots on the coating.

### app.print.technical\_data\_sheet.more\_information.cleaning

The coated parts must be cleaned according to the directives RAL-GZ 632 or SZFF 61.01. Technical Information IGP-TI 106 must also be observed when dealing with pearl mica effects.

### app.print.technical\_data\_sheet.film\_properties.graffiti\_removal

The following procedure should be observed when removing graffiti:

- The contact time of the graffiti with the surface must be kept as brief as possible
- Preliminary tests to select a suitable graffiti remover
- Thorough rinsing of the cleaned areas with water
- The contact time of the graffiti remover with the surface must be kept as brief as possible

IGP recommendation:

- Elite 007 graffiti remover from Crous Chemicals GmbH
- Socostrip T4210P from Socomore
- Bonderite S-ST 1302 and Bonderite C-MC 400 from Henkel AG
- or a different non-abrasive cleaner

### app.print.technical\_data\_sheet.more\_information.paint\_removal\_and\_disposal

After use, coated goods should be supplied to the normal recycling process. The disposal methods for sludges or residual powders must be observed in accordance with the local official provisions whilst taking Waste Code "080201 Coating Powder Wastes" in accordance with the European Waste Catalogue into consideration.

app.print.technical\_data\_sheet.infobox