



## Technical data sheet

# IGP-DURA®*pol* 682SA-C1

Silk gloss, low-temperature powder coating with a coarse texture and electrostatic dissipative properties (ESD).



## Characteristics

- Silk gloss
- Coarse texture
- Uni, without effect
- Industrial outdoor quality
- Electric. discharging



## Powder properties

|                          |                                                                |
|--------------------------|----------------------------------------------------------------|
| Particle size:           | < 100 µm                                                       |
| Solids:                  | > 99 %                                                         |
| Density:                 | 1.3 kg/l-1.6 kg/l                                              |
| Suitability for storage: | min. 24 months at ≤ 25 °C<br>in an unopened original container |
| Color tones:             | On request                                                     |



## Processing

### Pre-treatment

The substrate must be free from oil, grease and oxidation products. The pretreatment depends on the type of substrate and the corrosion protection to be achieved. We recommend the following pretreatments:

#### Aluminium

- Chromating according to DIN EN 12487
- Pre-anodization
- Chrome-free pretreatment according to GSB International and QUALICOAT specifications

#### Steel

- Zinc phosphating

#### Galvanised steel

- Zinc phosphating
- Chrome (III) passivation
- Chromating according to DIN EN 12487

The suitability of the pretreatment method used is generally to be tested by the coater in advance with appropriate test methods. The minimum requirement for aluminium substrates / galvanised steel components is to carry out a boiling water test with a subsequent cross-cut adhesion and tape test. We refer to the guidelines of the GSB International, Qualicoat and Qualisteelcoat certifications. For further information: see also our special leaflet on pre-treatment (IGP-TI 100).

### Coating devices

All conventional electrostatic systems with corona charging.


For the construction and operation of powder coating plants, the following regulations must be complied with: ATEX RL 2014/34/EU, EN 50177, DIN EN 16985.

### Recommended film thickness

80 µm - 100 µm

To ensure optimum conductivity, the recommended film thickness values should be followed. Please refer to technical information TI101.

### Curing conditions

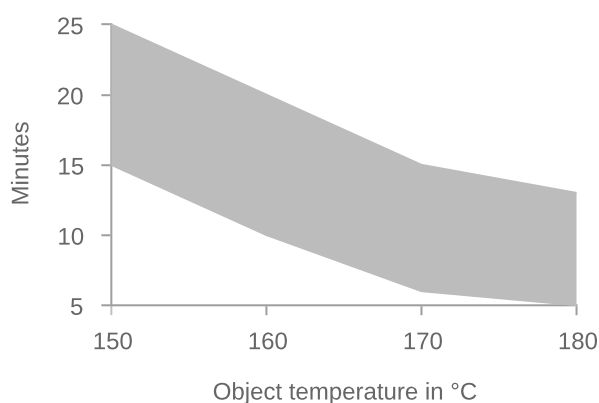

| T <sub>Object</sub> | t <sub>min</sub>  | t <sub>max</sub>  |
|---------------------|-------------------|-------------------|
| 150 °C              | 15 minutes        | 25 minutes        |
| <b>160 °C</b>       | <b>10 minutes</b> | <b>20 minutes</b> |
| 170 °C              | 6 minutes         | 15 minutes        |
| 180 °C              | 5 minutes         | 13 minutes        |

The oven temperature should be limited to 200°C

In order to determine ideal curing conditions, we recommend practical trials with the respective object and curing oven.

### Reclaimability

Small portions of recycled powder can be added, automatically if possible, to the fresh powder. Important: Keep overspray to an absolute minimum.

### Compatibility

Contamination with other powder coatings may result in a drop of the gloss level, cratering, loss of mechanical properties, etc. Devices and coating systems must be thoroughly cleaned before and after using the powder.



## Film properties

### Tested on

Substrate: Aluminum (AlMg1), 0.8mm, chromated  
 Film thickness: 80 µm - 100 µm  
 Object temperature: 160 °C, 10 min.

### Mechanical tests

Cross-cut adhesion test

Gt 0

DIN EN ISO 2409 2020-12

|                      |             |                                    |
|----------------------|-------------|------------------------------------|
| Mandrel bending test | ≤ 5 mm      | DIN EN ISO 1519 2011               |
| Impact test          | ≥ 10 inchp. | ASTM D 2794 1993                   |
| Erichsen cupping     | ≥ 5 mm      | DIN EN ISO 1520 2007-11            |
| Buchholz hardness    | ≥ 80        | DIN EN ISO 2815 2003-10 (Anhang A) |

#### Weathering tests

|                    |                       |                            |
|--------------------|-----------------------|----------------------------|
| QUV-SE-B-313, 200h | > 50 % residual gloss | DIN EN ISO 16474-3 2014-03 |
|--------------------|-----------------------|----------------------------|

#### Corrosion tests

|                                |                              |                           |
|--------------------------------|------------------------------|---------------------------|
| Condensation water test, 1000h | No infiltration, no blisters | DIN EN ISO 6270-2 2018-04 |
| Natural salt spray test, 1000h | No infiltration, no blisters | DIN EN ISO 9227 2017-07   |

#### Additional properties

|                                    |        |                          |
|------------------------------------|--------|--------------------------|
| electrostatic discharge resistance | TI 101 | DIN EN 61340-2-3 2017-05 |
|------------------------------------|--------|--------------------------|



## Further information

#### Packaging

20 kg cardboard box with inserted antistatic PE liner  
500 kg cardboard container with 25 antistatic PE-liners each 20kg

#### Protection of coated parts

Coated parts should be packed after cooling with suitable materials without plasticizers. They should be stored protected from the weather to avoid the formation of condensation and thus water spots on the coating.

#### Cleaning

The coated parts must be cleaned according to the directives RAL-GZ 632 or SZFF 61.01.

#### Paint removal and disposal

After use, coated goods should be supplied to the normal recycling process. The disposal methods for sludges or residual powders must be observed in accordance with the local official provisions whilst taking Waste Code "080201 Coating Powder Wastes" in accordance with the European Waste Catalogue into consideration.

This application-related advice is given to the best of our knowledge. However, this information is non-obligatory and does not exempt you from carrying out your own tests. Application, use and processing of these products are beyond our control and are therefore on your responsibility.

Consult the Safety Data Sheet prior to use. Article-specific safety data sheet and comprehensive risk management measures available at: [\*\*igp-powder.com\*\*](https://www.igp-powder.com)