



Scheda tecnica

IGP-DURA®*pol* 682SE-C1

Silk gloss, low-temperature powder coating with a coarse texture and electrostatic dissipative properties (ESD).



Proprietà

- semi lucido
- bucciato
- Perlato
- Mica
- Industrial outdoor quality
- Conduttivo



Proprietà delle polveri

Granulometria:	< 100 µm
Corpi solidi:	> 99 %
Densità:	1.3 kg/l-1.6 kg/l
Stoccaggio:	min. 24 months a ≤ 25 °C in an unopened original container
Color tones:	On request



Applicazione

Pretrattamento

The substrate must be free from oil, grease and oxidation products. The pretreatment depends on the type of substrate and the corrosion protection to be achieved. We recommend the following pretreatments:

Alluminio

- Chromating according to DIN EN 12487
- Pre-anodization
- Chrome-free pretreatment according to GSB International and QUALICOAT specifications

Acciaio

- Zinc phosphating

Acciaio zincato

- Zinc phosphating
- Chrome (III) passivation
- Chromating according to DIN EN 12487

The suitability of the pretreatment method used is generally to be tested by the coater in advance with appropriate test methods. The minimum requirement for aluminium substrates / galvanised steel components is to carry out a boiling water test with a subsequent cross-cut adhesion and tape test. We refer to the guidelines of the GSB International, Qualicoat and Qualisteelcoat certifications. For further information: see also our special leaflet on pre-treatment (IGP-TI 100).

Impianti di verniciatura

All conventional electrostatic systems with corona charging.


For the construction and operation of powder coating plants, the following regulations must be complied with: ATEX RL 2014/34/EU, EN 50177, DIN EN 16985.

Spessore del film consigliato

80 µm - 100 µm

With higher layers, the powder coating becomes insulating.

Condizioni di cottura

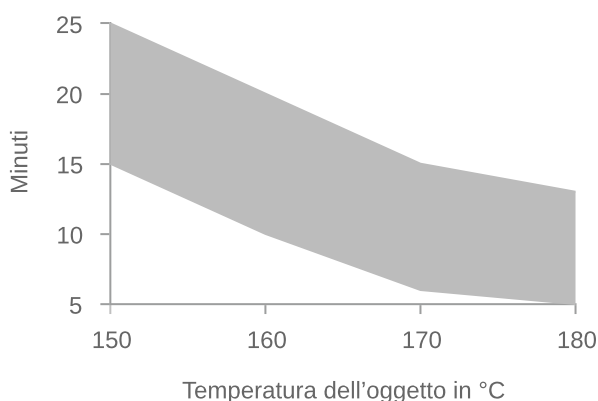

T _{oggetto}	t _{min}	t _{max}
150 °C	15 minutes	25 minutes
160 °C	10 minutes	20 minutes
170 °C	6 minutes	15 minutes
180 °C	5 minutes	13 minutes

Per accertare le condizioni di cottura migliori si consiglia, in ogni caso, di effettuare prove pratiche con il rispettivo oggetto e forno di polimerizzazione.

Recupero

Small portions of recovered powder can be added, automatically if possible, to the fresh powder. Important: Keep overspray to an absolute minimum. Processing instruction VR201.1 must be observed.

Compatibility

Contamination with other powder coatings may result in a drop of the gloss level, cratering, loss of mechanical properties, etc. Devices and coating systems must be thoroughly cleaned before and after using the powder.



Caratteristiche del film

Testato per

Substrati: Aluminum (AlMg1), 0.8mm, chromated
Spessore: 80 µm - 100 µm
Temperatura dell'oggetto: 160 °C, 10 min.

Prove meccaniche

Cross-cut adhesion test	Gt 0	DIN EN ISO 2409 2020-12
Mandrel bending test	≤ 5 mm	DIN EN ISO 1519 2011
Impact test	≥ 10 inchp.	ASTM D 2794 1993
Erichsen cupping	≥ 5 mm	DIN EN ISO 1520 2007-11
Buchholz hardness	≥ 80	DIN EN ISO 2815 2003-10

Test di resistenza agli agenti atmosferici

QUV-SE-B-313, 200h	> 50 % Brillantezza residua	DIN EN ISO 16474-3 2014-03
--------------------	-----------------------------	----------------------------

Verifiche della resistenza a corrosione

Condensation water test, 1000h	No infiltration, no blisters	DIN EN ISO 6270-2 2018-04
Natural salt spray test, 1000h	No infiltration, no blisters	DIN EN ISO 9227 2017-07

Additional properties

electrostatic discharge resistance	TI 101	DIN EN 61340-2-3 2017-05
------------------------------------	--------	--------------------------



Altre informazioni

Imballaggio

20 kg cardboard box with inserted antistatic PE liner
500 kg cardboard container with 25 antistatic PE-liners each 20kg

Protezione delle superfici verniciate

Coated parts should be packed after cooling with suitable materials without plasticizers. They should be stored protected from the weather to avoid the formation of condensation and thus water spots on the coating.

Pulizia

The coated parts must be cleaned according to the directives RAL-GZ 632 or SZFF 61.01. Technical Information IGP-TI 106 must also be observed when dealing with pearl mica effects.

Rimozione e smaltimento della pittura

After use, coated goods should be supplied to the normal recycling process. The disposal methods for sludges or residual powders must be observed in accordance with the local official provisions whilst taking Waste Code "080201 Coating Powder Wastes" in accordance with the European Waste Catalogue into consideration.

Le presenti informazioni di natura tecnica relative all'utilizzo sono fornite sulla base delle conoscenze attuali. Tuttavia devono essere considerate come indicazioni non vincolanti che non esonerano dall'effettuazione di controlli autonomi. Utilizzo, destinazione e applicazione di prodotti hanno luogo senza possibilità di controllo da parte nostra e, pertanto, soggiacciono esclusivamente alla vostra responsabilità.

Prima dell'applicazione consultare la scheda di sicurezza. Scheda di sicurezza specifica per l'articolo e misure più approfondite sulla gestione del rischio alla pagina: **igp-powder.com**