



Technical data sheet

IGP-DURA®*pol* 682SE-C1

Silk gloss, low-temperature powder coating with a coarse texture and electrostatic dissipative properties (ESD).



Characteristics

- Silk gloss
- Coarse texture
- Pearl mica
- Industrial outdoor quality
- Electric. discharging



Powder properties

Particle size:	< 100 µm
Solids:	> 99 %
Density:	1.3 kg/l-1.6 kg/l
Suitability for storage:	min. 24 months at ≤ 25 °C in an unopened original container
Color tones:	On request



Processing

Pre-treatment

The substrate must be free from oil, grease and oxidation products. The pretreatment depends on the type of substrate and the corrosion protection to be achieved. We recommend the following pretreatments:

Aluminium

- Chromating according to DIN EN 12487
- Pre-anodization
- Chrome-free pretreatment according to GSB International and QUALICOAT specifications

Steel

- Zinc phosphating

Galvanised steel

- Zinc phosphating
- Chrome (III) passivation
- Chromating according to DIN EN 12487

The suitability of the pretreatment method used is generally to be tested by the coater in advance with appropriate test methods. The minimum requirement for aluminium substrates / galvanised steel components is to carry out a boiling water test with a subsequent cross-cut adhesion and tape test. We refer to the guidelines of the GSB International, Qualicoat and Qualisteelcoat certifications. For further information: see also our special leaflet on pre-treatment (IGP-TI 100).

Coating devices

All conventional electrostatic systems with corona charging.


For the construction and operation of powder coating plants, the following regulations must be complied with: ATEX RL 2014/34/EU, EN 50177, DIN EN 16985.

Recommended film thickness

80 µm - 100 µm

At higher Film thicknesses, the powder coating becomes electrostatically insulating.

Curing conditions

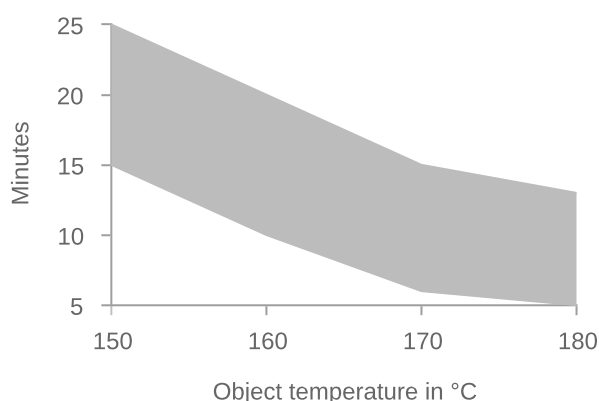

T Object	t min	t max
150 °C	15 minutes	25 minutes
160 °C	10 minutes	20 minutes
170 °C	6 minutes	15 minutes
180 °C	5 minutes	13 minutes

The oven temperature should be limited to 200°C

In order to determine ideal curing conditions, we recommend practical trials with the respective object and curing oven.

Reclaimability

Small portions of recovered powder can be added, automatically if possible, to the fresh powder. Important: Keep overspray to an absolute minimum. Processing instruction VR201.1 must be observed.

Compatibility

Contamination with other powder coatings may result in a drop of the gloss level, cratering, loss of mechanical properties, etc. Devices and coating systems must be thoroughly cleaned before and after using the powder.



Film properties

Tested on

Substrate: Aluminum (AlMg1), 0.8mm, chromated
 Film thickness: 80 µm - 100 µm
 Object temperature: 160 °C, 10 min.

Mechanical tests

Cross-cut adhesion test
 Mandrel bending test

Gt 0
 ≤ 5 mm

DIN EN ISO 2409 2020-12
 DIN EN ISO 1519 2011

Impact test	≥ 10 inchp.	ASTM D 2794 1993
Erichsen cupping	≥ 5 mm	DIN EN ISO 1520 2007-11
Buchholz hardness	≥ 80	DIN EN ISO 2815 2003-10 (Anhang A)

Weathering tests

QUV-SE-B-313, 200h	> 50 % residual gloss	DIN EN ISO 16474-3 2014-03
--------------------	-----------------------	----------------------------

Corrosion tests

Condensation water test, 1000h	No infiltration, no blisters	DIN EN ISO 6270-2 2018-04
Natural salt spray test, 1000h	No infiltration, no blisters	DIN EN ISO 9227 2017-07

Additional properties

electrostatic discharge resistance	TI 101	DIN EN 61340-2-3 2017-05
------------------------------------	--------	--------------------------



Further information

Packaging

20 kg cardboard box with inserted antistatic PE liner
500 kg cardboard container with 25 antistatic PE-liners each 20kg

Protection of coated parts

Coated parts should be packed after cooling with suitable materials without plasticizers. They should be stored protected from the weather to avoid the formation of condensation and thus water spots on the coating.

Cleaning

The coated parts must be cleaned according to the directives RAL-GZ 632 or SZFF 61.01. Technical Information IGP-TI 106 must also be observed when dealing with pearl mica effects.

Paint removal and disposal

After use, coated goods should be supplied to the normal recycling process. The disposal methods for sludges or residual powders must be observed in accordance with the local official provisions whilst taking Waste Code "080201 Coating Powder Wastes" in accordance with the European Waste Catalogue into consideration.

This application-related advice is given to the best of our knowledge. However, this information is non-obligatory and does not exempt you from carrying out your own tests. Application, use and processing of these products are beyond our control and are therefore on your responsibility.

Consult the Safety Data Sheet prior to use. Article-specific safety data sheet and comprehensive risk management measures available at: **[igp-powder.com](https://www.igp-powder.com)**