

Technical data sheet

IGP-DURA®than 8303B-A0

Matte, superdurable powder clear coat with a smooth finish.



Characteristics

- Matte
- Smooth finish
- Transparent
- High weather resistant industrial quality



Powder properties

Particle size:	< 100 µm
Solids:	> 99 %
Density:	1.2 kg/l-1.4 kg/l
Suitability for storage:	min. 24 months at ≤ 25 °C in an unopened original container
Color tones:	transparent-unicolor



Processing

Pre-treatment

Suitable for overcoating already painted surfaces, especially for the protection of metallic coatings.

The suitability of the pretreatment method used is generally to be tested by the coater in advance with appropriate test methods. We refer to the guidelines of the GSB International, Qualicoat and Qualisteelcoat certifications. For further information: see also our special leaflet on pre-treatment (IGP-TI100).

Coating devices


All commercially available electrostatic systems, both corona and tribo charge systems.

For the construction and operation of powder coating plants, the following regulations must be complied with: ATEX RL 2014/34/EU, EN 50177, DIN EN 16985.

Recommended film thickness

60 µm - 80 µm

Curing conditions

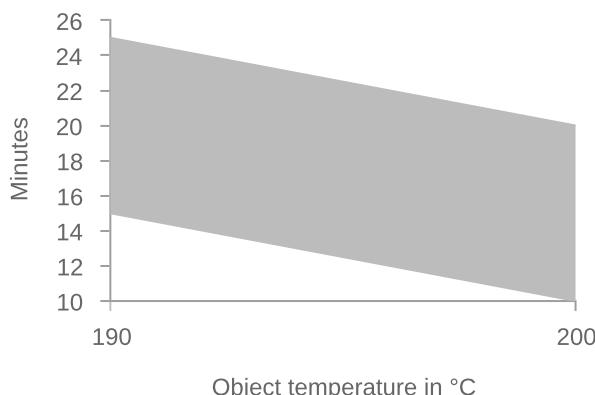

T Object	t min	t max
190 °C	15 minutes	25 minutes
200 °C	10 minutes	20 minutes

In order to determine ideal curing conditions, we recommend practical trials with the respective object and curing oven.

Reclaimability

Small portions of recycled powder can be added, automatically if possible, to the fresh powder. Important: Keep overspray to an absolute minimum.



Film properties

Tested on

Substrate: Aluminum (AlMg1), 0.8 mm chrom-free
Film thickness: 60 µm - 80 µm
Object temperature: 190 °C, 15 min.

Appearance

Gloss level	25-35 R'/60°	DIN EN ISO 2813 2015-02
-------------	--------------	-------------------------

Mechanical tests

Cross-cut adhesion test	Gt 0	DIN EN ISO 2409 2020-12
Mandrel bending test / Tape test	≤ 5 mm	DIN EN ISO 1519 2011
Impact test / Tape test	≥ 20 inchp.	ASTM D 2794 1993
Erichsen cupping / Tape test	≥ 5 mm	DIN EN ISO 1520 2007-11
Buchholz hardness	≥ 80	DIN EN ISO 2815 2003-10 (Anhang A)

Weathering tests

3 years Florida, 5° south	> 50 % residual gloss	DIN EN ISO 2810 2021-01
Xenon-arc lamps, 1000h, 90%	> 90 % residual gloss	DIN EN ISO 16474-2 2014-03

Chemical tests

Mortar resistance	Easily removable after 24h with no residues.	ASTM D 3260 2001
-------------------	--	------------------



Further information

Packaging

15 kg cardboard box with inserted antistatic PE liner

Overcoating suitability

Preliminary tests are mandatory for overcoating painted surfaces.

Printing and glueing

Preliminary tests are mandatory for printing and glueing of painted surfaces.

Protection of coated parts

Coated parts should be packed after cooling with suitable materials without plasticizers. They should be stored protected from the weather to avoid the formation of condensation and thus water spots on the coating.

Cleaning

The coated parts must be cleaned according to the directives RAL-GZ 632 or SZFF 61.01.

Paint removal and disposal

After use, coated goods should be supplied to the normal recycling process. The disposal methods for sludges or residual powders must be observed in accordance with the local official provisions whilst taking Waste Code "080201 Coating Powder Wastes" in accordance with the European Waste Catalogue into consideration.

This application-related advice is given to the best of our knowledge. However, this information is non-obligatory and does not exempt you from carrying out your own tests. Application, use and processing of these products are beyond our control and are therefore on your responsibility.

Consult the Safety Data Sheet prior to use. Article-specific safety data sheet and comprehensive risk management measures available at: igp-powder.com