



Technical data sheet

IGP-HWFindustry 792SA-A0

Superdurable, low-temperature powder coatings, curable at 160°C or above, for heavy steel parts and constructions.



Characteristics

- Silk gloss
- Coarse texture
- Uni, without effect
- High weather resistant industrial quality



Powder properties

Particle size:	< 100 µm
Solids:	> 99 %
Density:	1.3 kg/l-1.6 kg/l
Suitability for storage:	min. 24 months at ≤ 25 °C in an unopened original container
Color tones:	On request



Processing

Pre-treatment

The substrate must be free from oil, grease and oxidation products. The pretreatment depends on the type of substrate and the corrosion protection to be achieved. We recommend the following pretreatments:

Steel

- Blasting (at least SA 2 ½)
- Iron phosphating
- Zinc phosphating

Galvanised steel

- Zinc phosphating
- Chrome (III) passivation
- Chromating according to DIN EN 12487

For improved corrosion protection for applications on steel / galvanised steel, the use of corrosion protection primer IGP-KORROPRIMER 18 is recommended.

The suitability of the pretreatment method used is generally to be tested by the coater in advance with appropriate test methods. The minimum requirement for aluminium substrates / galvanised steel components is to carry out a boiling water test with a subsequent cross-cut adhesion and tape test. We refer to the guidelines of the GSB International, Qualicoat and Qualisteelcoat certifications. For further information: see also our special leaflet on pre-treatment (IGP-TI 100).

Coating devices

All commercially available electrostatic systems, both corona and tribo charge systems.

For the construction and operation of powder coating plants, the following regulations must be complied with: ATEX RL 2014/34/EU, EN 50177, DIN EN 16985.


Recommended film thickness

100 µm - 120 µm

A homogeneous coating result with textured paints or colour or article-specific differences in hiding power may require higher Film thicknesses. The corresponding processing guidelines must be observed.

For a preliminary calculation of the required powder coating quantity, the required Film thickness must be determined for each specific article.

Curing conditions

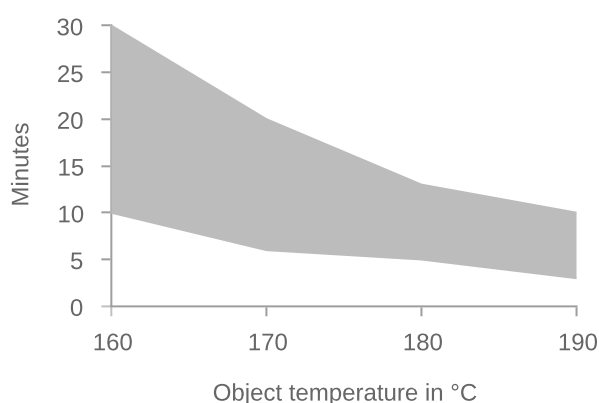

T _{Object}	t _{min}	t _{max}
160 °C	10 minutes	30 minutes
170 °C	6 minutes	20 minutes
180 °C	5 minutes	13 minutes
190 °C	3 minutes	10 minutes

The oven temperature should be limited to 200°C

In order to determine ideal curing conditions, we recommend practical trials with the respective object and curing oven.

Application

For an optimal coating and surface quality, please follow the recommendations set out in the VR202 processing guidelines.

Reclaimability

To prevent contamination, special care must be taken to ensure that the entire coating plant is thoroughly cleaned before loading a coarse-textured powder, as well as when switching back to other powder grades.

As a general rule, uni coarse-textured powder coatings are suitable for reclaiming. Effect-based coarse-textured powder coatings can also be processed with a certain proportion of reclaimed powder, subject to prior testing.

Please refer to the effect category on the container label and the processing guideline VR202.

Compatibility

Contamination with other powder coatings may result in a drop of the gloss level, cratering, loss of mechanical properties, etc. Devices and coating systems must be thoroughly cleaned before and after using the powder.



Film properties

Tested on

Substrate:	Steel, 0.5mm
Film thickness:	100 µm - 120 µm
Object temperature:	160 °C, 10 min.

Mechanical tests

Cross-cut adhesion test	Gt 0	DIN EN ISO 2409 2020-12
Ericksen cupping / Tape test	≥ 2 mm	DIN EN ISO 1520 2007-11

Weathering tests

QUV-SE-B-313, 600h	> 50 % residual gloss	DIN EN ISO 16474-3 2014-03
Xenon-arc lamps, 1500h	> 70 % residual gloss	DIN EN ISO 16474-2 2014-03

Corrosion tests

Condensation water test, 480h	No delamination No bubbles No edge corrosion	DIN EN ISO 6270-2 2018-04
Neutral salt spray test, 480h	Iron phosphating (Gardobond 4976 / 6800 OC): < 5mm infiltration Low edge corrosion no blistering Zinc phosphating (Gardobond 26S / 6800 OC): < 1mm infiltration very low edge corrosion no blistering	DIN EN ISO 9227 2017-07

Chemical tests

Operating materials	Good resistance to chemicals, especially cleaning agents, operating fluids and fuels.
Acids and alkalis	Good resistance to many dilute acids and alkalis.



Further information

Packaging

20 kg cardboard box with inserted antistatic PE liner

500 kg cardboard container with 25 antistatic PE-liners each 20kg

500 kg Big Bag

Overcoating suitability

Preliminary tests are mandatory for overcoating painted surfaces.

Printing and glueing

Preliminary tests are mandatory for printing and glueing of painted surfaces.

Protection of coated parts

Coated parts should be packed after cooling with suitable materials without plasticizers. They should be stored protected from the weather to avoid the formation of condensation and thus water spots on the coating.

Cleaning

The coated parts must be cleaned according to the directives RAL-GZ 632 or SZFF 61.01.

Paint removal and disposal

After use, coated goods should be supplied to the normal recycling process. The disposal methods for sludges or residual powders must be observed in accordance with the local official provisions whilst taking Waste Code "080201 Coating Powder Wastes" in accordance with the European Waste Catalogue into consideration.

This application-related advice is given to the best of our knowledge. However, this information is non-obligatory and does not exempt you from carrying out your own tests. Application, use and processing of these products are beyond our control and are therefore on your responsibility.

Consult the Safety Data Sheet prior to use. Article-specific safety data sheet and comprehensive risk management measures available at: [igp-powder.com](https://www.igp-powder.com)