

app.print.technical\_data\_sheet.title

## IGP-HWFsuperior 571TU-R1

Deep matte, fine-textured effect powder coating in super durable-PLUS quality with increased robustness and flexibility, manufactured with IGP-Effectives® technology.



### app.print.technical\_data\_sheet.characteristics

- Deep matte
- Fine texture
- IGP-Effectives®
- Super durable facade quality, 5 years Florida > 50% residual gloss
- More robust & pliable
- Clean Effect



- GSB 173 f - Florida 5
- Part of QSC-System
- Qualicoat Nr. P-1856, class 2



### app.print.technical\_data\_sheet.powder\_properties.title

app.print.technical\_data\_sheet.powder\_properties.particle\_size: 100 per cent  
 app.print.technical\_data\_sheet.powder\_properties.solid: 99.8 per cent  
 app.print.technical\_data\_sheet.powder\_properties.density: 3.7 kg/l  
 app.print.technical\_data\_sheet.powder\_properties.storage\_suitability.prefix: 24 months  
 app.print.technical\_data\_sheet.powder\_properties.storage\_suitability.at: 25 °C  
 app.print.technical\_data\_sheet.powder\_properties.storage\_suitability.in: in an unopened original container  
 app.print.technical\_data\_sheet.powder\_properties.binding: RAL Metallics and binders  
 app.print.technical\_data\_sheet.powder\_properties.binding.additional: additional metallic colors on request



### app.print.technical\_data\_sheet.processing.title

#### app.print.technical\_data\_sheet.processing.substrates

The substrate must be free from oil, grease and oxidation products. The pretreatment depends on the type of substrate and the corrosion protection to be achieved. We recommend the following pretreatments:

Aluminium

- Chromating according to DIN EN 12487
- Pre-anodization
- Chrome-free pretreatment according to GSB International and QUALICOAT specifications

Steel

- Zinc phosphating

Galvanised steel

- Zinc phosphating
- Chrome (III) passivation
- Chromating according to DIN EN 12487

For improved corrosion protection for applications on steel / galvanised steel, the use of corrosion protection primer IGP-KORROPRIMER 10 or IGP-KORROPRIMER 60 is recommended.

The suitability of the pretreatment method used is generally to be tested by the coater in advance with appropriate test methods. The minimum requirement for aluminium substrates / galvanised steel components is to carry out a boiling water test with a subsequent cross-cut adhesion and tape test. We refer to the guidelines of the GSB International, Qualicoat and Qualisteelcoat certifications. For further information: see also our special leaflet on pre-treatment (IGP-TI 100).

#### **app.print.technical\_data\_sheet.processing.coating\_devices**

All conventional electrostatic systems with corona charging.

For the construction and operation of powder coating plants, the following regulations must be complied with: ATEX RL 2014/34/EU, EN 50177, DIN EN 16985.


#### **app.print.technical\_data\_sheet.processing.recommended\_film\_thickness**

60 µm - 80 µm

A homogeneous coating result with textured coatings or article- and color specific differences in hiding power may require higher coating thicknesses. The corresponding processing guidelines must be observed.

For a pre-calculation of the required powder coating quantity, the necessary coating thickness must be determined for each article.

#### **app.print.technical\_data\_sheet.processing.curing\_condition\_recommendation**

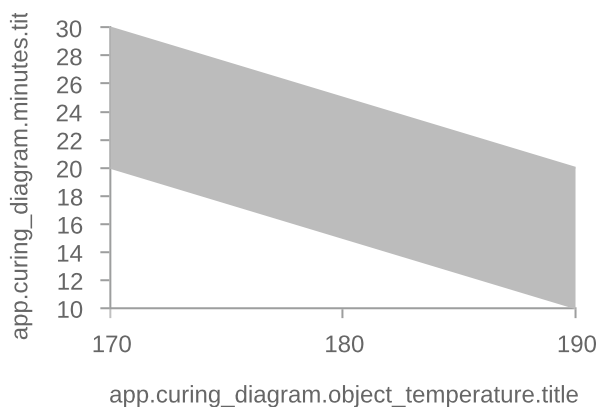

#### **app.print.technical\_data\_sheet.processing.curing\_conditi**

170 °C

**180 °C**

190 °C

In order to determine ideal curing conditions, we recommend practical trials with the respective object and curing oven.

#### **app.print.technical\_data\_sheet.processing.reclaimability**

Due to the high bonding rate of powder grain and effect agent, the powder can be charged much more uniformly compared to other effect finishing processes. As a result, the powder can be processed with a significantly increased recovery rate. Processing instruction VR214 & VR201.2 must be observed.



## app.print.technical\_data\_sheet.film\_properties.title

### app.print.technical\_data\_sheet.film\_properties.tested\_on.title

app.print.technical\_data\_sheet.film\_properties.tested\_on.title: 40 percent (ASTM G31) 0.8 mm chrom-free  
 app.print.technical\_data\_sheet.film\_properties.film\_thickness: 60 percent 80 μm film thickness:  
 app.print.technical\_data\_sheet.film\_properties.subject\_temperature: 120 °C ± 5

### app.print.technical\_data\_sheet.film\_properties.appearance

app.print.technical_data_sheet.film_properties.appearance: Top R / 60°	DIN EN ISO 2813 2015-02
--	-------------------------

### app.print.technical\_data\_sheet.film\_properties.mechanical\_tests

Cross-cut adhesion test	Gt 0	DIN EN ISO 2409 2020-12
Mandrel bending test / Tape test	≤ 5 mm	DIN EN ISO 1519 2011
Impact test / Tape test	≥ 20 inchp.	ASTM D 2794 1993
Erichsen cupping / Tape test	≥ 5 mm	DIN EN ISO 1520 2007-11
Buchholz hardness	≥ 80	DIN EN ISO 2815 2003-10

### app.print.technical\_data\_sheet.film\_properties.weathering\_tests

5 years Florida, 5° south	> 50 %	
Xenon-arc lamps, 1000h, 90%	app.print.technical_data_sheet.film_properties.residual_gloss > 90 %	DIN EN ISO 16474-2 2014-03
QUV-SE-B-313, 1000h	app.print.technical_data_sheet.film_properties.residual_gloss > 50 %	DIN EN ISO 16474-3 2014-03

### app.print.technical\_data\_sheet.film\_properties.corrosion\_tests

Acetic acid salt spray test, 1000h	No infiltration, no blisters	DIN EN ISO 9227 2017-07
Condensation water test, 1000h	No infiltration, no blisters	DIN EN ISO 6270-2 2018-04

### app.print.technical\_data\_sheet.film\_properties.chemical\_tests

Mortar resistance	Easily removable after 24h with no residues.	ASTM D 3260 2001
-------------------	--	------------------



## app.print.technical\_data\_sheet.more\_information.title

### app.print.technical\_data\_sheet.processing.overcoating

Preliminary tests are mandatory for overcoating painted surfaces.

### app.print.technical\_data\_sheet.processing.printing\_and\_glueing

Preliminary tests are mandatory for printing and glueing of painted surfaces.

### app.print.technical\_data\_sheet.more\_information.protection\_of\_coated\_parts

Coated parts should be packed after cooling with suitable materials without plasticizers. They should be stored protected from the weather to avoid the formation of condensation and thus water spots on the coating.

**app.print.technical\_data\_sheet.more\_information.cleaning**

The coated parts must be cleaned according to the directives RAL-GZ 632 or SZFF 61.01. Technical Information IGP-TI 106 must also be observed when dealing with pearl mica effects.

**app.print.technical\_data\_sheet.more\_information.paint\_removal\_and\_disposal**

After use, coated goods should be supplied to the normal recycling process. The disposal methods for sludges or residual powders must be observed in accordance with the local official provisions whilst taking Waste Code "080201 Coating Powder Wastes" in accordance with the European Waste Catalogue into consideration.

app.print.technical\_data\_sheet.infobox